

Erratum to
 The filtration characteristics of hollow fiber microfiltration –
 Effect of various kinds of solids in the excess activated sludge
 [Desalination and Water Treatment, Volume 17 (2010) 155–159]*

Kenji Kawasaki**, Hisako Tanimoto, Ryo Nagasaki, Akira Matsuda

Department of Applied Chemistry, Ehime University, 3 Bunkyo-cho, Matsuyama, Ehime 790-8577, Japan
 Tel. +81 899279940, Fax +81 899279947; email: kawasaki@eng.ehime-u.ac.jp

Page 157 left column line 11 from bottom should read:

- (c) R_{mc} (R of washed membrane) is obtained from the flux (J_v) of the method 4), where the membrane is clogged at the end of filtration. Accordingly, R_{cl} (R of clogging) is calculated from $(R_{mc} - R_m)$.

Page 158, the correct Fig. 5 is

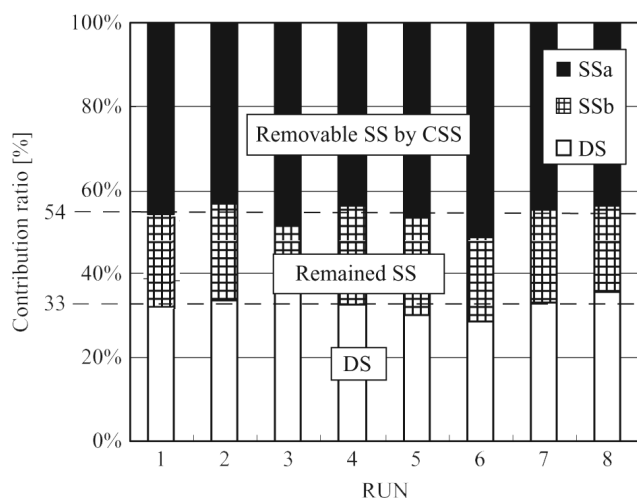


Fig. 5. Contribution of each sample solids to R_c .

* doi number of the original article is 10.5004/dwt.2010.1712

** Corresponding author